


PARTS	RATIO	SPEED (RPM)	LOAD (Nm In-lbs)	PARTS	RATIO	SPEED (RPM)	LOAD (Nm In-lbs)
MPG100-03	3:1	500	2.1 18.59	MPG100-36	36:1	41	22.7 200.91
MPG100-05	5:1	300	3.49 30.89	MPG100-40	40:1	37.5	25.2 223.04
MPG100-06	6:1	250	4.19 37.08	MPG100-50	50:1	30	28.5 252.25
MPG100-7.5	7.5:1	200	5.24 46.38	MPG100-60	60:1	25	34.2 302.70
MPG100-10	10:1	150	6.3 55.76	MPG100-75	75:1	20	40.0 354.03
MPG100-12.5	12.5:1	120	7.87 69.66	MPG100-90	90:1	16	40.0 354.03
MPG100-15	15:1	100	9.45 83.64	MPG100-100	100:1	15	40.0 354.03
MPG100-18	18:1	83	11.3 100.01	MPG100-120	120:1	12.5	40.0 354.03
MPG100-20	20:1	75	12.6 111.52	MPG100-150	150:1	10	40.0 354.03
MPG100-25	25:1	60	15.7 138.96	MPG100-180	180:1	8	40.0 354.03
MPG100-30	30:1	50	18.9 167.28				

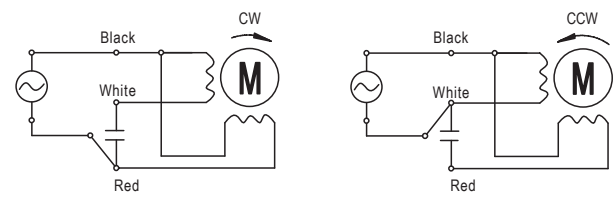

AC100-115-140 MOTOR SPECIFICATIONS						
Power (W)	Voltage (VAC)	Rated Current (A)	Starting Torque (mNm)	Rated Speed (RPM)	Rated Torque (mNm)	Capacitor (μF)
140	115/ph	2.0	750	1500	890	24

Unit: mm	Technical reference	Created by	Approved by
		Document type	Document status
		Title AC100 140W Series	
		Rev.	Date of issue
		Sheet	